


Lapped Flange 150 Lbs - ANSI B16.5



Lapped Flange, 150 Lbs - ANSI B16.5

* An "X" combined with green marking: in stock

* Red marking: 1 or 2 days

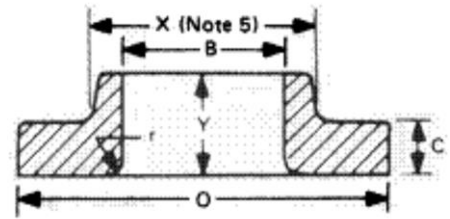

Lapped

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,9	0,902	0,38	0,84			
3/4"	26,7	1,050"	28,2	1,111	0,55	1,21			
1"	33,4	1,315"	35,1	1,383	0,76	1,68			
1.1/4"	42,2	1,660"	43,7	1,722	1,01	2,23			
1.1/2"	48,3	1,900"	50,0	1,970	1,30	2,87			
2"	60,3	2,375"	62,5	2,463	2,03	4,48			
2.1/2"	73	2,875"	75,4	2,971	3,25	7,16			
3"	88,9	3,500"	91,4	3,601	3,81	8,40			
4"	114,3	4,500"	116,8	4,602	5,25	11,57			
5"	141,3	5,563"	144,5	5,693	6,02	13,27			
6"	168,3	6,625"	171,5	6,757	7,40	16,31			
8"	219,1	8,625"	222,3	8,759	12,10	26,68			
10"	273	10,750"	277,4	10,930	16,40	36,16			
12"	323,9	12,750"	328,2	12,931	26,10	57,54			
14"	355,6	14,000"	360,2	14,192	34,5	76,06			
16"	406,4	16,000"	411,2	16,201	44,6	98,33			
18"	457,2	18,000"	462,3	18,215	48,7	107,36			
20"	508	20,000"	514,4	20,267	61,6	135,80			
24"	609,6	24,000"	616,0	24,270	86,6	190,92			