


Lapped Flange 300 Lbs - ANSI B16.5



Lapped Flange, 300 Lbs - ANSI B16.5

* An "X" combined with green marking: in stock

* Red marking: 1 or 2 days

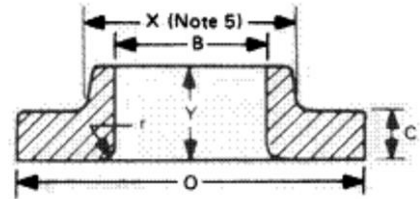

Lapped

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,9	0,902	0,62	1,37			
3/4"	26,7	1,050"	28,2	1,111	1,10	2,43			
1"	33,4	1,315"	35,1	1,383	1,33	2,93			
1.1/4"	42,2	1,660"	43,7	1,722	1,65	3,64			
1.1/2"	48,3	1,900"	50,0	1,970	2,44	5,38			
2"	60,3	2,375"	62,5	2,463	2,83	6,24			
2.1/2"	73	2,875"	75,4	2,971	4,25	9,37			
3"	88,9	3,500"	91,4	3,601	5,78	12,74			
4"	114,3	4,500"	116,8	4,602	9,55	21,05			
5"	141,3	5,563"	144,5	5,693	12,20	26,90			
6"	168,3	6,625"	171,5	6,757	15,50	34,17			
8"	219,1	8,625"	222,3	8,759	24,10	53,13			
10"	273	10,750"	277,4	10,930	34,4	75,84			
12"	323,9	12,750"	328,2	12,931	50,4	111,11			
14"	355,6	14,000"	360,2	14,192	70,9	156,31			
16"	406,4	16,000"	411,2	16,201	89,5	197,31			
18"	457,2	18,000"	462,3	18,215	111	244,71			
20"	508	20,000"	514,4	20,267	137	302,03			
24"	609,6	24,000"	616,0	24,270	204	449,74			