


## Lapped Flange 900 Lbs - ANSI B16.5



### Lapped Flange, 900 Lbs - ANSI B16.5

\* An "X" combined with green marking: in stock

\* Red marking: 1 or 2 days

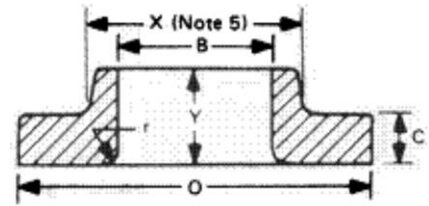

Lapped

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,9	0,902					
3/4"	26,7	1,050"	28,2	1,111					
1"	33,4	1,315"	35,1	1,383					
1.1/4"	42,2	1,660"	43,7	1,722					
1.1/2"	48,3	1,900"	50,0	1,970					
2"	60,3	2,375"	62,5	2,463					
2.1/2"	73	2,875"	75,4	2,971					
3"	88,9	3,500"	91,4	3,601	11,3	24,89			
4"	114,3	4,500"	116,8	4,602	19,2	42,29			
5"	141,3	5,563"	144,5	5,693	31,2	68,72			
6"	168,3	6,625"	171,5	6,757	40,5	89,21			
8"	219,1	8,625"	222,3	8,759	71,5	157,49			
10"	273	10,750"	277,4	10,930	104,0	229,07			
12"	323,9	12,750"	328,2	12,931	139,0	306,17			
14"	355,6	14,000"	360,2	14,192	161,0	354,63			
16"	406,4	16,000"	411,2	16,201	194,0	427,31			
18"	457,2	18,000"	462,3	18,215	267,0	588,11			
20"	508	20,000"	514,4	20,267	334,0	735,68			
24"	609,6	24,000"	616,0	24,270	618,0	1361,23			