


## Lapped Flange 1500 Lbs - ANSI B16.5



### Lapped Flange, 1500 Lbs - ANSI B16.5

- \* An "X" combined with green marking: in stock
- \* Red marking: 1 or 2 days

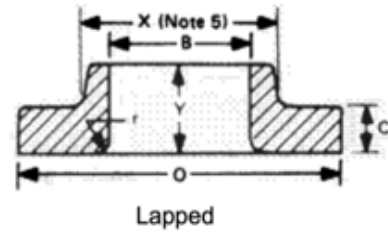

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,9	0,902	1,71	3,77			
3/4"	26,7	1,050"	28,2	1,111	2,30	5,07			
1"	33,4	1,315"	35,1	1,383	3,40	7,49			
1.1/4"	42,2	1,660"	43,7	1,722	3,85	8,48			
1.1/2"	48,3	1,900"	50,0	1,970	5,28	11,63			
2"	60,3	2,375"	62,5	2,463	9,78	21,54			
2.1/2"	73	2,875"	75,4	2,971	13,60	29,96			
3"	88,9	3,500"	91,4	3,601	17,80	39,21			
4"	114,3	4,500"	116,8	4,602	27,50	60,57			
5"	141,3	5,563"	144,5	5,693	51,50	113,44			
6"	168,3	6,625"	171,5	6,757	62,00	136,56			
8"	219,1	8,625"	222,3	8,759	105,00	231,28			
10"	273	10,750"	277,4	10,930	179,00	394,27			
12"	323,9	12,750"	328,2	12,931	269,00	592,51			
14"	355,6	14,000"	360,2	14,192	365,00	803,96			
16"	406,4	16,000"	411,2	16,201	459,00	1011,01			
18"	457,2	18,000"	462,3	18,215	598,00	1317,18			
20"	508	20,000"	514,4	20,267	712,00	1568,28			
24"	609,6	24,000"	616,0	24,270	1090,00	2400,88			