


Lapped Flange 2500 Lbs - ANSI B16.5



Lapped Flange, 2500 Lbs - ANSI B16.5

- * An "X" combined with green marking: in stock
- * Red marking: 1 or 2 days

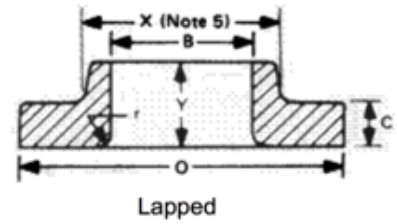

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,9	0,902	2,92	6,43			
3/4"	26,7	1,050"	28,2	1,111	3,4	7,49			
1"	33,4	1,315"	35,1	1,383	4,77	10,51			
1.1/4"	42,2	1,660"	43,7	1,722	7,08	15,59			
1.1/2"	48,3	1,900"	50,0	1,970	9,93	21,87			
2"	60,3	2,375"	62,5	2,463	14,7	32,38			
2.1/2"	73	2,875"	75,4	2,971	21,3	46,92			
3"	88,9	3,500"	91,4	3,601	32,3	71,15			
4"	114,3	4,500"	116,8	4,602	52,5	115,64			
5"	141,3	5,563"	144,5	5,693	82,6	181,94			
6"	168,3	6,625"	171,5	6,757	127	279,74			
8"	219,1	8,625"	222,3	8,759	186	409,69			
10"	273	10,750"	277,4	10,930	352	775,33			
12"	323,9	12,750"	328,2	12,931	501	1103,52			
14"	355,6	14,000"	360,2	14,192					
16"	406,4	16,000"	411,2	16,201					
18"	457,2	18,000"	462,3	18,215					
20"	508	20,000"	514,4	20,267					
24"	609,6	24,000"	616,0	24,270					