

## Threaded Flange 2500 Lbs - ANSI B16.5




### Threaded Flange, 2500 Lbs - ANSI B16.5

#### Raised Face

\* An "X" combined with green marking: in stock

\* Red marking: 1 or 2 days

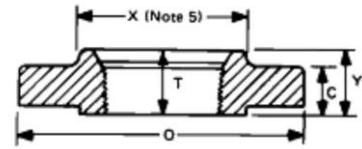

Threaded

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	2,95	6,50			
3/4"	26,7	1,050"	3,44	7,58			
1"	33,4	1,315"	4,82	10,62			
1.1/4"	42,2	1,660"	7,14	15,73			
1.1/2"	48,3	1,900"	10,00	22,03			
2"	60,3	2,375"	14,80	32,60			
2.1/2"	73	2,875"	21,50	47,36			
3"	88,9	3,500"	32,60	71,81			
4"	114,3	4,500"	52,90	116,52			
5"	141,3	5,563"	83,10	183,04			
6"	168,3	6,625"	128,00	281,94			
8"	219,1	8,625"	188,00	414,10			
10"	273	10,750"	355,00	781,94			
12"	323,9	12,750"	504,00	1110,13			
14"	355,6	14,000"					
16"	406,4	16,000"					
18"	457,2	18,000"					
20"	508	20,000"					
24"	609,6	24,000"					