


Saddles - DIN 2618



Saddles DIN 2618

* An "X" combined with green marking: in stock

* Red marking: 1 or 2 days

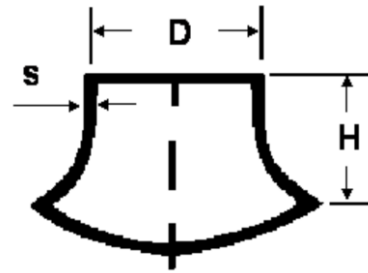

Outside diameter mm D	Wall thickness mm s	Height mm	Weight kg	Available in stock
20,0	2	30	0,030	
21,3	2	30	0,030	
25,0	2	30	0,050	
26,9	2,3	30	0,060	
30,0	2,3	30	0,070	
31,8	2,3	30	0,080	
33,7	2,6	30	0,080	
35,0	2,6	35	0,110	
38,0	2,6	35	0,120	
42,4	2,6	35	0,130	
44,5	2,6	35	0,140	
48,3	2,6	40	0,180	
54,0	2,6	40	0,190	
57,0	2,9	40	0,250	
60,3	2,9	45	0,270	
63,5	2,9	45	0,310	
70,0	2,9	50	0,360	
76,1	2,9	50	0,450	
82,5	3,2	55	0,570	
88,9	3,2	60	0,600	
95,0	3,6	65	0,800	
101,6	3,6	65	1,000	
108,0	3,6	65	1,050	
114,3	3,6	65	1,100	
133,0	4	85	1,700	
139,7	4	85	1,800	
159,0	4,5	100	2,700	
168,3	4,5	100	2,800	
193,7	5,6	125	4,700	

Outside diameter mm D	Wall thickness mm s	Height mm	Weight kg	Available in stock
219,1	6,3	135	6,400	
244,5	6,3	150	8,300	
267,0	6,3	150	9,700	
273,0	6,3	150	9,900	
323,9	7,1	175	15,800	
355,6	8	200	22,200	
368,0	8	200	23,000	
406,4	8,8	200	30,000	
419,0	10	200	36,000	
457,2	10	225	44,000	
470,0	10,5	225	47,000	
508,0	11	250	58,000	
521,0	11,5	250	62,000	
610,0	12,5	300	92,000	
622,0	13	300	105,000	