


Welding Neck Flange 300 Lbs - ANSI B16.5



Welding Neck Flange, 300 Lbs - ANSI B16.5 Raised Face

* An "X" combined with green marking: in stock
* Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

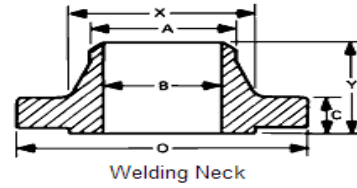

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	Std XS	10 S	21,3	0,840"	17,08	0,673	0,75	1,65			
					15,70	0,619					
		160	13,90	0,548	11,70	0,461					
3/4"	Std XS	10 S	26,7	1,050"	22,48	0,886	1,26	2,78			
					20,90	0,823					
		160	18,90	0,745	15,50	0,611					
1"	Std XS XXS	10 S	33,4	1,315"	27,86	1,098	1,52	3,35			
					26,60	1,048					
		160	24,20	0,953	20,60	0,812					
1.1/4"	Std XS XXS	10 S	42,2	1,660"	36,66	1,444	2,03	4,48			
					35,00	1,379					
		160	32,40	1,277	29,40	1,158					
1.1/2"	Std XS XXS	10 S	48,3	1,900"	42,76	1,685	2,89	6,37			
					40,90	1,611					
		160	38,10	1,501	34,10	1,344					
2"	Std XS XXS	10 S	60,3	2,375"	54,76	2,158	3,40	7,50			
					52,50	2,069					
		160	49,30	1,942	42,90	1,690					
2.1/2"	Std XS XXS	10 S	73	2,875"	66,90	2,636	5,17	11,40			
					62,60	2,466					
		160	59,00	2,325	54,00	2,128					
3"	Std XS XXS	10 S	88,9	3,500"	82,80	3,262	6,93	15,28			
					77,90	3,069					
		160	73,70	2,904	66,70	2,628					
4"	Std XS XXS	10 S	114,3	4,500"	108,20	4,263	11,20	24,69			
					102,30	4,031					
		120	97,10	3,826	92,00	3,625					
5"	Std XS XXS	10 S	141,3	5,563"	134,50	5,299	15,10	33,29			
					128,10	5,047					
		160	122,30	4,819	103,10	4,062					
6"	Std XS XXS	10 S	168,3	6,625"	161,50	6,363	19,10	42,11			
					154,10	6,072					
		120	146,30	5,764	139,70	5,504					
160	131,70	5,189	124,30	4,897							

