


Welding Neck Flange 600 Lbs - ANSI B16.5



Welding Neck Flange, 600 Lbs - ANSI B16.5 Raised Face

* An "X" combined with green marking: in stock
* Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

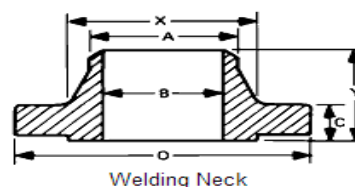

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	Std XS XXS	10 S 160	21,3	0,840"	17,08	0,673	0,87	1,92			
					15,70	0,619					
					13,90	0,548					
3/4"	Std XS XXS	10 S 160	26,7	1,050"	22,48	0,886	1,34	2,95			
					20,90	0,823					
					18,90	0,745					
1"	Std XS XXS	10 S 160	33,4	1,315"	27,86	1,098	1,76	3,88			
					26,60	1,048					
					24,20	0,953					
1.1/4"	Std XS XXS	10 S 160	42,2	1,660"	36,66	1,444	2,49	5,49			
					35,00	1,379					
					32,40	1,277					
1.1/2"	Std XS XXS	10 S 160	48,3	1,900"	42,76	1,685	3,49	7,69			
					40,90	1,611					
					38,10	1,501					
2"	Std XS XXS	10 S 160	60,3	2,375"	54,76	2,158	4,36	9,61			
					52,50	2,069					
					49,30	1,942					
2.1/2"	Std XS XXS	10 S 160	73	2,875"	66,90	2,636	6,43	14,18			
					62,60	2,466					
					59,00	2,325					
3"	Std XS XXS	10 S 160	88,9	3,500"	82,80	3,262	8,53	18,81			
					77,90	3,069					
					73,70	2,904					
4"	Std XS XXS	10 S 120 160	114,3	4,500"	108,20	4,263	17,4	38,36			
					102,30	4,031					
					97,10	3,826					
5"	Std XS XXS	10 S 120 160	141,3	5,563"	134,50	5,299	29,2	64,37			
					128,10	5,047					
					122,30	4,819					
6"	Std XS XXS	10 S 120 160	168,3	6,625"	161,50	6,363	34,9	76,94			
					154,10	6,072					
					146,30	5,764					

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
8"	Std XS	10 S	219,1	8,625"	211,58	8,336	53,9	118,83			
		20			206,30	8,128					
		30			205,02	8,078					
					202,70	7,986					
		120			193,70	7,632					
		160			182,50	7,191					
					173,08	6,819					
10"	Std XS	10 S	273	10,750"	264,62	10,426	86,5	190,70			
		20			260,20	10,252					
		30			257,40	10,142					
					254,40	10,023					
		80			247,60	9,755					
		120			242,80	9,566					
					230,20	9,070					
					215,80	8,503					
12"	Std XS	10 S	323,9	12,750"	314,76	12,402	103	227,07			
		20			311,10	12,257					
		30			307,10	12,100					
					304,90	12,013					
		40			303,30	11,950					
		80			298,50	11,761					
					288,90	11,383					
					273,10	10,760					
14"	Std XS	10 S	355,6	14,000"	346,04	13,634	122	268,96			
		20			339,80	13,388					
					336,60	13,262					
		40			333,40	13,136					
		80			330,20	13,010					
		120			317,40	12,506					
					300,00	11,820					
16"	Std XS	10 S	406,4	16,000"	396,84	15,635	170	374,78			
		20			390,60	15,390					
					387,40	15,264					
		80			381,00	15,011					
					363,60	14,326					
18"	Std XS	10 S	457,2	18,000"	447,64	17,637	204	449,74			
		20			441,40	17,391					
					438,20	17,265					
		30			435,00	17,139					
		40			431,80	17,013					
		80			428,60	16,887					
					409,60	16,138					
20"	Std XS	10 S	508	20,000"	496,92	19,579	254	559,97			
		20			489,00	19,267					
					482,60	19,014					
		40			477,80	18,825					
					455,60	17,951					
24"	Std XS	10 S	609,6	24,000"	596,90	23,518	358	789,25			
		20			590,60	23,270					
					584,20	23,017					
		30			581,00	22,891					
		40			574,60	22,639					
		80			547,60	21,575					