


Welding Neck Flange 900 Lbs - ANSI B16.5



Welding Neck Flange, 900 Lbs - ANSI B16.5 Raised Face

* An "X" combined with green marking: in stock
* Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

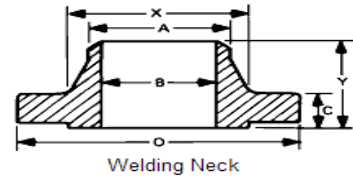

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"		10 S	21,3	0,840"	17,08	0,673					
	Std				15,70	0,619					
	XS				13,90	0,548					
		160			11,70	0,461					
3/4"		10 S	26,7	1,050"	22,48	0,886					
	Std				20,90	0,823					
	XS				18,90	0,745					
		160			15,50	0,611					
1"		10 S	33,4	1,315"	27,86	1,098					
	Std				26,60	1,048					
	XS				24,20	0,953					
		160			20,60	0,812					
		XXS			15,20	0,599					
1.1/4"		10 S	42,2	1,660"	36,66	1,444					
	Std				35,00	1,379					
	XS				32,40	1,277					
		160			29,40	1,158					
		XXS			22,80	0,898					
1.1/2"		10 S	48,3	1,900"	42,76	1,685					
	Std				40,90	1,611					
	XS				38,10	1,501					
		160			34,10	1,344					
		XXS			27,90	1,099					
2"		10 S	60,3	2,375"	54,76	2,158					
	Std				52,50	2,069					
	XS				49,30	1,942					
		160			42,90	1,690					
		XXS			38,10	1,501					
2.1/2"		10 S	73	2,875"	66,90	2,636					
	Std				62,60	2,466					
	XS				59,00	2,325					
		160			54,00	2,128					
		XXS			44,90	1,769					
3"		10 S	88,9	3,500"	82,80	3,262	13,70	30,20			
	Std				77,90	3,069					
	XS				73,70	2,904					
		160			66,70	2,628					
		XXS			58,50	2,305					
4"		10 S	114,3	4,500"	108,20	4,263	22,50	49,60			
	Std				102,30	4,031					
	XS				97,10	3,826					
		120			92,00	3,625					
		160			87,30	3,440					
		XXS			80,10	3,156					
5"		10 S	141,3	5,563"	134,50	5,299	37,40	82,45			
	Std				128,10	5,047					
	XS				122,30	4,819					
		XXS			103,10	4,062					
6"		10 S	168,3	6,625"	161,50	6,363	47,70	105,16			
	Std				154,10	6,072					
	XS				146,30	5,764					
		120			139,70	5,504					
		160			131,70	5,189					
		XXS			124,30	4,897					

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
8"	Std XS	10 S	219,1	8,625"	211,58	8,336	81,30	179,23			
		20			206,30	8,128					
		30			205,02	8,078					
					202,70	7,986					
					193,70	7,632					
					182,50	7,191					
	160	173,08	6,819								
10"	Std XS	10 S	273	10,750"	264,62	10,426	119,00	262,35			
		20			260,20	10,252					
		30			257,40	10,142					
					254,40	10,023					
					247,60	9,755					
					242,80	9,566					
	120	230,20	9,070								
	160	215,80	8,503								
12"	Std XS	10 S	323,9	12,750"	314,76	12,402	157,00	346,12			
		20			311,10	12,257					
		30			307,10	12,100					
					304,90	12,013					
					303,30	11,950					
					298,50	11,761					
	80	288,90	11,383								
	120	273,10	10,760								
14"	Std XS	10 S	355,6	14,000"	346,04	13,634	180,00	396,83			
		20			339,80	13,388					
					336,60	13,262					
					333,40	13,136					
					330,20	13,010					
					317,40	12,506					
	120	300,00	11,820								
16"	Std XS	10 S	406,4	16,000"	396,84	15,635	217,00	478,40			
		20			390,60	15,390					
					387,40	15,264					
					381,00	15,011					
					363,60	14,326					
					80	363,60					
18"	Std XS	10 S	457,2	18,000"	447,64	17,637	292,00	643,74			
		20			441,40	17,391					
					438,20	17,265					
					435,00	17,139					
					431,80	17,013					
					428,60	16,887					
	80	409,60	16,138								
20"	Std XS	10 S	508	20,000"	496,92	19,579	362,00	798,07			
		20			489,00	19,267					
					482,60	19,014					
					477,80	18,825					
					455,60	17,951					
					80	455,60					
24"	Std XS	10 S	609,6	24,000"	596,90	23,518	665,00	1466,06			
		20			590,60	23,270					
					584,20	23,017					
					581,00	22,891					
					574,60	22,639					
					80	547,60					