


## Welding Neck Flange 1500 Lbs - ANSI B16.5



### Welding Neck Flange, 1500 Lbs - ANSI B16.5 Raised Face

- \* An "X" combined with green marking: in stock
- \* Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

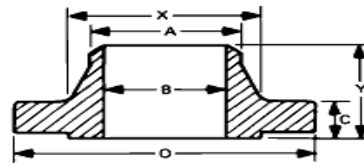

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L		
			mm	inch	mm	inch	kg/ea	lbs/ea					
1/2"	Std XS	10 S	21,3	0,840"	17,08	0,673	1,87	4,12					
					15,70	0,619							
					13,90	0,548							
3/4"	Std XS	10 S	26,7	1,050"	22,48	0,886	2,56	5,64					
					20,90	0,823							
					18,90	0,745							
1"	Std XS XXS	10 S	33,4	1,315"	27,86	1,098	3,74	8,25					
					26,60	1,048							
					24,20	0,953							
1.1/4"	Std XS XXS	10 S	42,2	1,660"	36,66	1,444	4,33	9,55					
					35,00	1,379							
					32,40	1,277							
1.1/2"	Std XS XXS	10 S	48,3	1,900"	42,76	1,685	5,94	13,10					
					40,90	1,611							
					38,10	1,501							
2"	Std XS XXS	10 S	60,3	2,375"	54,76	2,158	10,80	23,81					
					52,50	2,069							
					49,30	1,942							
2.1/2"	Std XS XXS	10 S	73	2,875"	66,90	2,636	15,00	33,07					
					62,60	2,466							
					59,00	2,325							
3"	Std XS XXS	10 S	88,9	3,500"	82,80	3,262	19,90	43,87					
					77,90	3,069							
					73,70	2,904							
4"	Std XS XXS	10 S	114,3	4,500"	108,20	4,263	29,90	65,92					
					102,30	4,031							
					97,10	3,826							
		120	160	160	114,3	4,500"	92,00	3,625	29,90	65,92			
							87,30	3,440					
							80,10	3,156					
5"	Std XS XXS	10 S	141,3	5,563"	134,50	5,299	55,40	122,13					
					128,10	5,047							
					122,30	4,819							

