


Welding Neck Flange 2500 Lbs - ANSI B16.5



Welding Neck Flange, 2500 Lbs - ANSI B16.5 Raised Face

† An "X" combined with green marking: in stock
 † Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

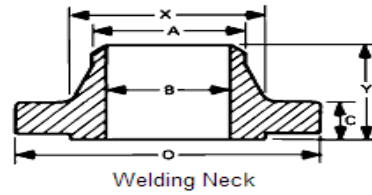

Norm. diam. inch	Std XS XXS	Sch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
			mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"		10 S	21,3	0,840"	17,08	0,673	3,12	6,88			
	Std				15,70	0,619					
	XS				13,90	0,548					
		160			11,70	0,461					
3/4"		10 S	26,7	1,050"	22,48	0,886	3,7	8,16			
	Std				20,90	0,823					
	XS				18,90	0,745					
		160			15,50	0,611					
1"		10 S	33,4	1,315"	27,86	1,098	5,24	11,55			
	Std				26,60	1,048					
	XS				24,20	0,953					
		160			20,60	0,812					
		XXS			15,20	0,599					
1.1/4"		10 S	42,2	1,660"	36,66	1,444	7,74	17,06			
	Std				35,00	1,379					
	XS				32,40	1,277					
		160			29,40	1,158					
		XXS			22,80	0,898					
1.1/2"		10 S	48,3	1,900"	42,76	1,685	10,9	24,03			
	Std				40,90	1,611					
	XS				38,10	1,501					
		160			34,10	1,344					
		XXS			27,90	1,099					
2"		10 S	60,3	2,375"	54,76	2,158	16,2	35,71			
	Std				52,50	2,069					
	XS				49,30	1,942					
		160			42,90	1,690					
		XXS			38,10	1,501					
2.1/2"		10 S	73	2,875"	66,90	2,636	23,7	52,25			
	Std				62,60	2,466					
	XS				59,00	2,325					
		160			54,00	2,128					
		XXS			44,90	1,769					
3"		10 S	88,9	3,500"	82,80	3,262	36,2	79,81			
	Std				77,90	3,069					
	XS				73,70	2,904					
		160			66,70	2,628					
		XXS			58,50	2,305					
4"		10 S	114,3	4,500"	108,20	4,263	55,3	121,91			
	Std				102,30	4,031					
	XS				97,10	3,826					
		120			92,00	3,625					
		160			87,30	3,440					
		XXS			80,10	3,156					
5"		10 S	141,3	5,563"	134,50	5,299	92,5	203,93			
	Std				128,10	5,047					
	XS				122,30	4,819					
		XXS			103,10	4,062					

