


## Hexagonal bushings



### Hexagonal bushings EN 10241

\* An "X" combined with green marking: in stock

\* Red marking: 1 or 2 days

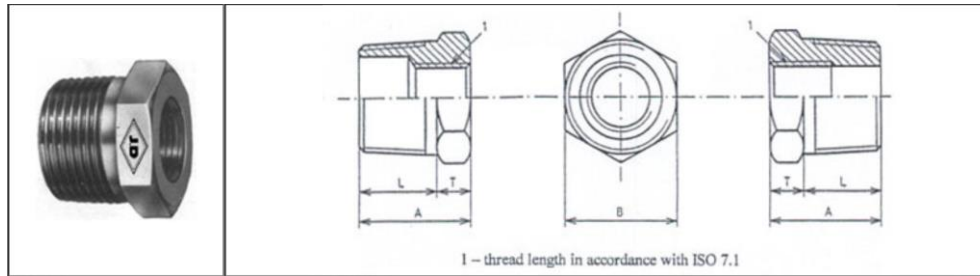

Norm. Size		Min. length of thread mm L	Thickness of hexagon mm T	Overall length mm A	Width across flats of hexagon		Available in stock	
mm	inch				Galvanized B	Black	Galvanized	
8	1/4"	13	6	18,5	14,0			
10	3/8"	13	8	20,5	17,0			
15	1/2"	18	8	25,5	22,0			
20	3/4"	19	10	29,0	27,0			
25	1"	21	10	31,0	36,0			
32	1" 1/4	24	11	35,0	46,0			
40	1" 1/2	24	13	37,0	50,0			
50	2"	27	14	41,0	65,0			
65	2" 1/2	32	16	48,0	78,0			
80	3"	35	19	54,0	90,0			
100	4"	40	22	62,0	115,0			
125	5"	45	25	70,0	140,0			
150	6"	45	25	70,0	166,0			