


Slip On Welding Flange 150 Lbs - ANSI B16.5



Slip On Welding Flange, 150 Lbs - ANSI B16.5 Raised Face

- * An "X" combined with green marking: in stock
- * Red marking: 1 or 2 days

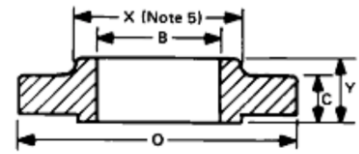

Slip On Welding

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,4	0,883	0,39	0,86			
3/4"	26,7	1,050"	27,7	1,091	0,56	1,23			
1"	33,4	1,315"	34,5	1,359	0,78	1,72			
1.1/4"	42,2	1,660"	43,2	1,702	1,03	2,27			
1.1/2"	48,3	1,900"	49,5	1,950	1,32	2,91			
2"	60,3	2,375"	62,0	2,443	2,06	4,54			
2.1/2"	73	2,875"	74,7	2,943	3,28	7,23			
3"	88,9	3,500"	90,7	3,574	3,85	8,49			
4"	114,3	4,500"	116,1	4,574	5,30	11,68			
5"	141,3	5,563"	143,8	5,666	6,07	13,38			
6"	168,3	6,625"	170,7	6,726	7,45	16,42			
8"	219,1	8,625"	221,5	8,727	12,10	26,68			
10"	273	10,750"	276,4	10,890	16,50	36,38			
12"	323,9	12,750"	327,2	12,892	26,20	57,76			
14"	355,6	14,000"	359,2	14,152	34,60	76,28			
16"	406,4	16,000"	410,5	16,174	44,80	98,77			
18"	457,2	18,000"	461,8	18,195	48,90	107,80			
20"	508	20,000"	513,1	20,216	61,90	136,46			
24"	609,6	24,000"	616,0	24,270	86,90	191,58			