


## Slip On Welding Flange 600 Lbs - ANSI B16.5



### Slip On Welding Flange, 600 Lbs - ANSI B16.5 Raised Face

- \* An "X" combined with green marking: in stock
- \* Red marking: 1 or 2 days

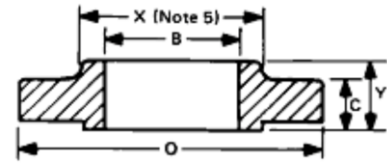

Slip On Welding

Flanges acc. To ASTM/ASME ANSI B16.5

Norm. diam. inch	D		B		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	21,3	0,840"	22,4	0,883	0,74	1,63			
3/4"	26,7	1,050"	27,7	1,091	1,27	2,80			
1"	33,4	1,315"	34,5	1,359	1,52	3,35			
1.1/4"	42,2	1,660"	43,2	1,702	2,03	4,48			
1.1/2"	48,3	1,900"	49,5	1,950	2,96	6,53			
2"	60,3	2,375"	62,0	2,443	3,62	7,98			
2.1/2"	73	2,875"	74,7	2,943	5,28	11,64			
3"	88,9	3,500"	90,7	3,574	7,00	15,43			
4"	114,3	4,500"	116,1	4,574	14,50	31,97			
5"	141,3	5,563"	143,8	5,666	24,40	53,79			
6"	168,3	6,625"	170,7	6,726	28,70	63,27			
8"	219,1	8,625"	221,5	8,727	43,40	95,68			
10"	273	10,750"	276,4	10,890	70,30	154,98			
12"	323,9	12,750"	327,2	12,892	84,2	185,63			
14"	355,6	14,000"	359,2	14,152	98,7	217,59			
16"	406,4	16,000"	410,5	16,174	142	313,05			
18"	457,2	18,000"	461,8	18,195	173	381,40			
20"	508	20,000"	513,1	20,216	220	485,01			
24"	609,6	24,000"	616,0	24,270	312	687,84			