


Socket Welding Flange 150 Lbs - ANSI B16.5



Socket Welding Flange, 150 Lbs - ANSI B16.5 Raised Face

- * An "X" combined with green marking: in stock
- * Red marking: 1 or 2 days

Flanges acc. To ASTM/ASME ANSI B16.5

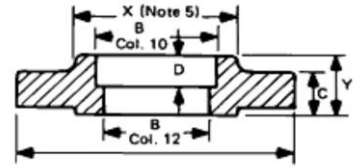

Norm. diam. inch	Sch	D		B		B1		theor. weight		ASTMA 105	ASTMA 350 GR. LF2	ASTMA 182 GR. F316L
		mm	inch	mm	inch	mm	inch	kg/ea	lbs/ea			
1/2"	Std XS XXS	21,3	0,840"	22,40	0,883	15,70	0,619	0,42	0,93			
3/4"	Std XS XXS	26,7	1,050"	27,70	1,091	20,80	0,820	0,59	1,30			
1"	Std XS XXS	33,4	1,315"	34,50	1,359	26,70	1,052	0,81	1,79			
1.1/4"	Std XS XXS	42,2	1,660"	43,20	1,702	35,10	1,383	1,07	2,36			
1.1/2"	Std XS XXS	48,3	1,900"	49,50	1,950	40,90	1,611	1,36	3,00			
2"	Std XS XXS	60,3	2,375"	62,00	2,443	52,60	2,072	2,10	4,63			
2.1/2"	Std XS XXS	73	2,875"	74,70	2,943	62,70	2,470	3,33	7,34			
3"	Std XS XXS	88,9	3,500"	90,70	3,574	78,00	3,073	3,90	8,60			