


I-Beams PE

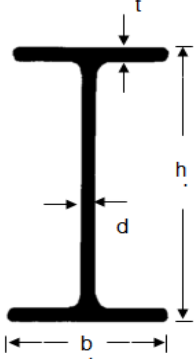

- * From stock: 6 m length
- * An "X" combined with green marking: in stock
- * Red marking: 1 or 2 days

	Profile no.	Dimensions in mm.				Surface area m ² /m	Weight kg/m	Material grades	
		h	b	d	t			S235	S355
I-Beams PE S 235 JR S 355 J2 + AR EN 10025 Tol. EN 10034 Certificate: EN 10204/3.1 	80	80	46	3,8	5,2	0,33	6,00		X
	100	100	55	4,1	5,7	0,40	8,10		X
	120	120	64	4,4	6,3	0,48	10,4		X
	140	140	73	4,7	6,9	0,55	12,9		X
	160	160	82	5,0	7,4	0,62	15,8		X
	180	180	91	5,3	8,0	0,70	18,8		X
	200	200	100	5,6	8,5	0,77	22,4		X
	220	220	110	5,9	9,2	0,85	26,2		X
	240	240	120	6,2	9,8	0,92	30,7		X
	270	270	135	6,6	10,2	1,04	36,1		X
	300	300	150	7,1	10,7	1,16	42,2		X
	330	330	160	7,5	11,5	1,25	49,1		
	360	360	170	8,0	12,7	1,35	57,1		
	400	400	180	8,6	13,5	1,47	66,3		
	450	450	190	9,4	14,6	1,61	77,6		
	500	500	200	10,2	16,0	1,74	90,7		
550	550	210	11,1	17,2	1,88	106			
600	600	220	12,0	19,0	2,01	122			