


I-Beams PE

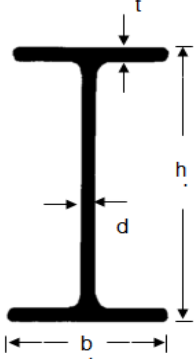

- * From stock: 6 m length
- * An "X" combined with green marking: in stock
- * Red marking: 1 or 2 days

	Profile no.	Dimensions in mm.				Surface area m ² /m	Weight kg/m	Material grades	
		h	b	d	t			S 235	S 355
I-Beams PE S 235 JR S 355 J2 + AR EN 10025 Tol. EN 10034 Certificate: EN 10204/3.1 	80	80	46	3,8	5,2	0,33	6,00		X
	100	100	55	4,1	5,7	0,40	8,10		X
	120	120	64	4,4	6,3	0,48	10,4		X
	140	140	73	4,7	6,9	0,55	12,9		X
	160	160	82	5,0	7,4	0,62	15,8		X
	180	180	91	5,3	8,0	0,70	18,8		X
	200	200	100	5,6	8,5	0,77	22,4		X
	220	220	110	5,9	9,2	0,85	26,2		X
	240	240	120	6,2	9,8	0,92	30,7		X
	270	270	135	6,6	10,2	1,04	36,1		X
	300	300	150	7,1	10,7	1,16	42,2	X	
	330	330	160	7,5	11,5	1,25	49,1		
	360	360	170	8,0	12,7	1,35	57,1		
	400	400	180	8,6	13,5	1,47	66,3		X
	450	450	190	9,4	14,6	1,61	77,6		
	500	500	200	10,2	16,0	1,74	90,7		
550	550	210	11,1	17,2	1,88	106			
600	600	220	12,0	19,0	2,01	122			